


# Double Head Slasher

High flow option available  
(uses two motors)

Pivoting quick hitch frame  
to allow deck to follow the  
contours of the ground

Cutter bars driven directly by  
hydraulic motor(s) – no belts used

High quality hydraulic motor fitted  
with a cross port check valve to  
allow blades to die down when  
hydraulic flow is shut off

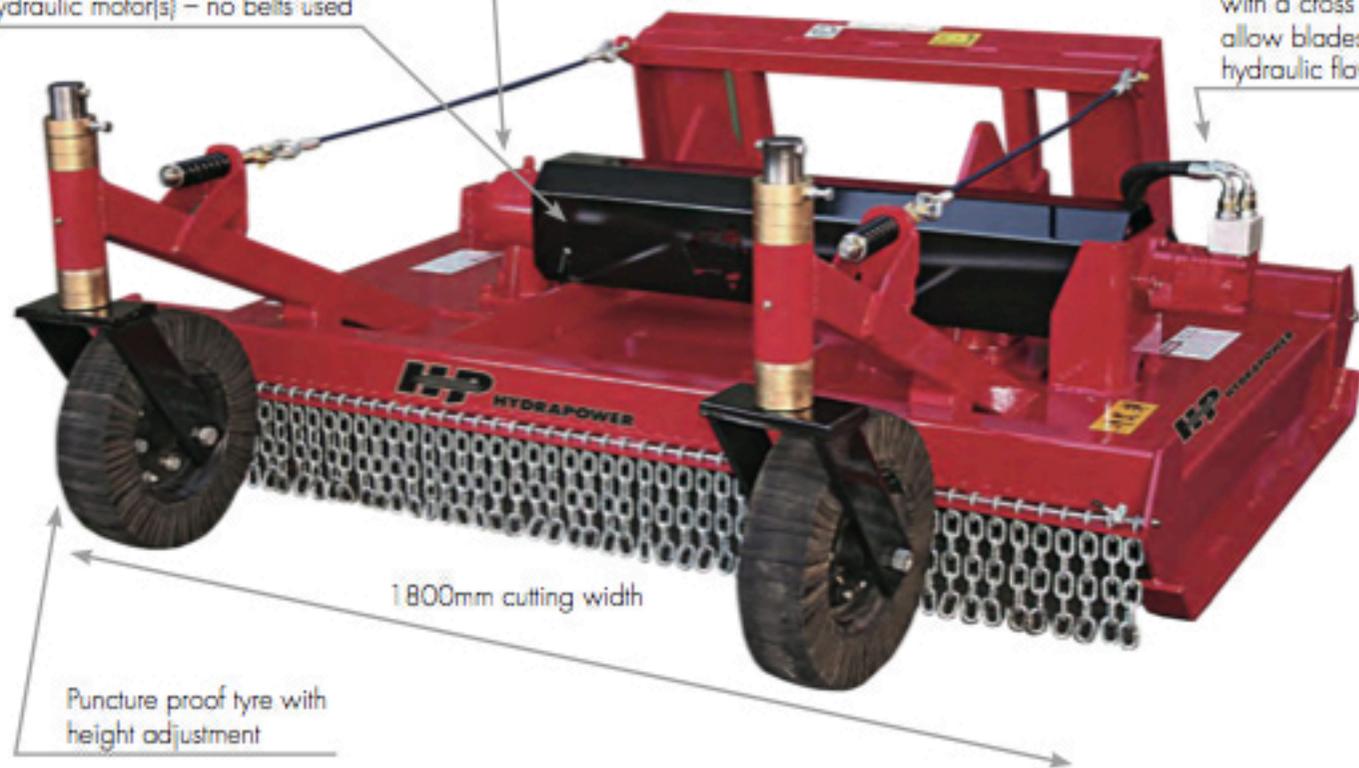

1800mm cutting width

Puncture proof tyre with  
height adjustment