

SELF-PROPELLED SCISSOR LIFTS

GS™ -2668 RT & GS™ -3268 RT

Specifications

| MODELS | GS™-2668 RT | | GS™-3268 RT | |
|--|-------------|---------------|-------------|--------------|
| | Metric | US | Metric | US |
| Working height maximum* | 9.92 m | 32 ft | 11.75 m | 38 ft |
| A Platform height maximum | 7.92 m | 26 ft | 9.75 m | 32 ft |
| B Platform height - stowed | 1.19 m | 3 ft 10.75 in | 1.31 m | 4 ft 3.75 in |
| C Platform length - outside | 2.51 m | 8 ft 3 in | 2.51 m | 8 ft 3 in |
| extended | 3.96 m | 13 ft | 3.96 m | 13 ft |
| Slide-out platform extension deck | 1.52 m | 5 ft | 1.52 m | 5 ft |
| D Platform width - outside | 1.55 m | 5 ft 1 in | 1.55 m | 5 ft 1 in |
| Toeboard height | 0.15 m | 6 in | 0.15 m | 6 in |
| E Height - stowed** | 2.32 m | 7 ft 7.5 in | 2.45 m | 8 ft 5 in |
| rails lowered | 1.70 m | 5 ft 7 in | 1.83 m | 6 ft |
| F Length - stowed with outriggers | 3.38 m | 11 ft 3 in | 3.38 m | 11 ft 3 in |
| G Width | 1.73 m | 5 ft 8 in | 1.73 m | 5 ft 8 in |
| H Wheelbase | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in |
| I Ground clearance - centre | 0.20 m | 8 in | 0.20 m | 8 in |

PRODUCTIVITY

| | | | | |
|-------------------------------|--------------|--------------|--------------|--------------|
| Maximum platform occupancy*** | | | | |
| - indoor | 4 | 4 | 4 | 4 |
| - outdoor | 4 | 4 | 2 | 2 |
| Lift capacity | 567 kg | 1,250 lbs | 454 kg | 1,000 lbs |
| Extension deck capacity | 136 kg | 300 lbs | 136 kg | 300 lbs |
| Drive speed - stowed | 6.1 km/h | 3.8 mph | 6.1 km/h | 3.8 mph |
| Drive speed - raised | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph |
| Gradeability - stowed**** | 35% | 35% | 30% | 30% |
| Maximum outrigger leveling: | | | | |
| front to back | 6.6° | 6.6° | 6.6° | 6.6° |
| side to side | 10.6° | 10.6° | 10.6° | 10.6° |
| Turning radius - inside | 1.52 m | 5 ft | 1.52 m | 5 ft |
| Turning radius - outside | 3.68 m | 12 ft 1 in | 3.68 m | 12 ft 1 in |
| Raise/lower speed | 30 / 35 sec | 30 / 35 sec | 40 / 37 sec | 40 / 37 sec |
| Controls | proportional | | proportional | |
| Drive | four wheel | | four wheel | |
| Tyres - rough terrain | 30 x 60 cm | 12 x 23.5 in | 30 x 60 cm | 12 x 23.5 in |

POWER


| | | | | |
|---------------------------|------------------------------|----------|------------------------------|----------|
| Power source | Kubota D-1105 Diesel 24.9 hp | | Kubota D-1105 Diesel 24.9 hp | |
| Fuel tank capacity | 56.8 L | 15 gal | 56.8 L | 15 gal |
| Hydraulic system capacity | 62.5 L | 16.5 gal | 62.5 L | 16.5 gal |

WEIGHT*****

| | | | | |
|-----------------|----------|-----------|----------|-----------|
| with outriggers | 3,415 kg | 7,529 lbs | 4,153 kg | 9,156 lbs |
|-----------------|----------|-----------|----------|-----------|

STANDARDS COMPLIANCE

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

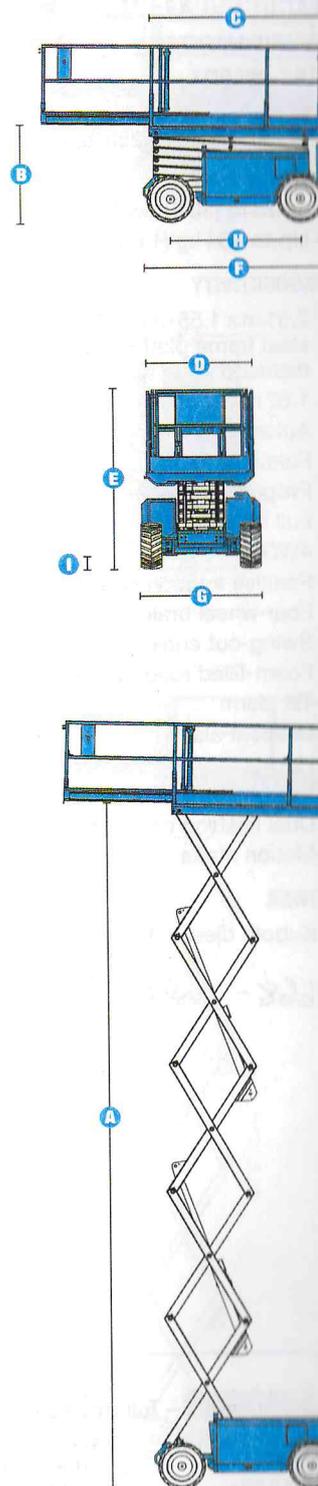

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Based on RT tyres; deduct 2 in (5.8 cm) for turf and non-marking tyres.

*** CE/AUS markets: GS-3268 limited to 2 person platform occupancy when used outdoors.

**** Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.

***** Weight varies depending on options and country standards.