



since 1946

Ernest Fleming
machinery & equipment pty ltd

Website: www.fleming.com.au

Phone: (+61) 02 9427 3270

Email: sales@fleming.com.au

Address: 7/27 Mars Rd, Lane Cove West, Sydney NSW 2066 Australia

Flamingo Bench-top Automatic Filling & Capping System

This module utilizes an advanced automatic interface, Safe simple and user friendly changeover parameters can be adjusted and programs saved in PLC by DELTA touchscreen HMI

The filling head can be matched with gear pump, peristaltic pump ceramic pump or Piston-pump to meet the requirements of all liquid / high Viscosity filling Applications.





* Air operated screw on capper- torque adjustable.

- Quantitative filling values,
- Constant torque screw cap,
- Consistent Output
- Maximum production 2100 bottles per hour (product and application dependent)
- No bottle- no fill function
- Manually placed caps with cap detection sensor

Suitable and versatile for Wide range of applications: medicine, pharmacy, food, cosmetics, spices, essential oil, chemical and other industries where small volume arer equired.

Interchangeable Star wheel and modular filling arrangements versatile for different bottles and cap arrangements. 240V and compressed air 6-8 bar pressure required.

EFGPC-B-150

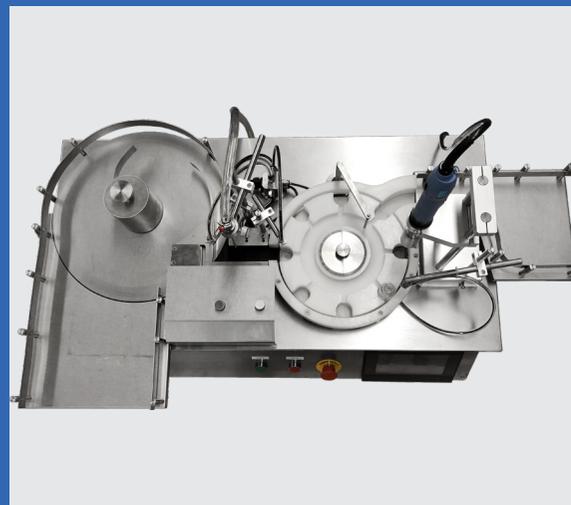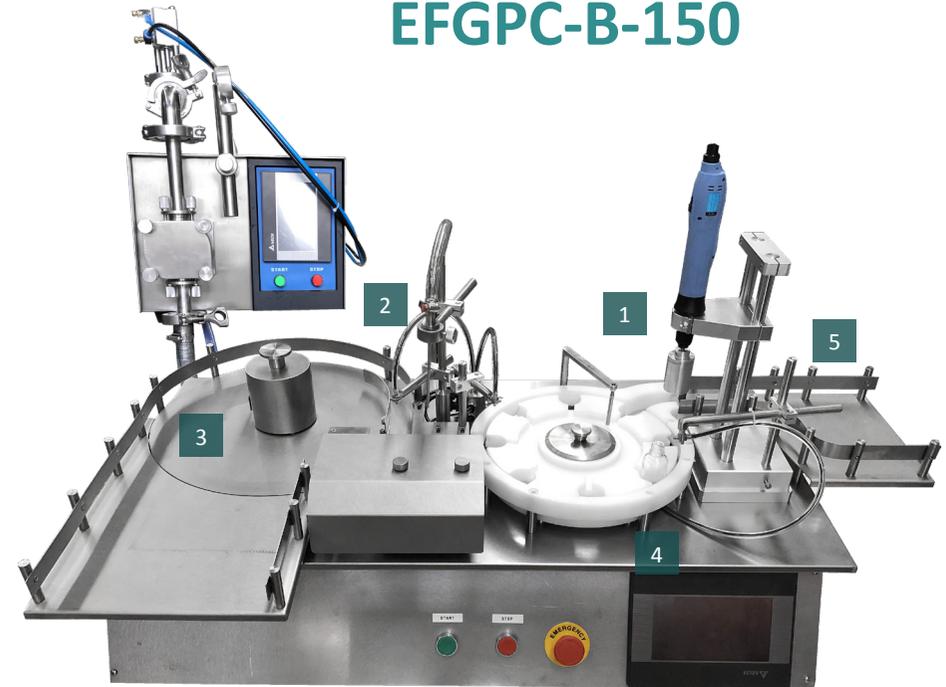

Specifications

Volume	ml	10-100
Accuracy	%	1-2
Speed	bpm	15-35
Supply Power	V	240/50-60HZ
Air Pressure required	bar	6-8
width	mm	620
height	mm	518
length	mm	1150
weight	kg	75
bottle height range	mm	60-150
bottle diameter range	mm	20-45

* Please confirm specifications on order as features may change