


HTL-4014 Load Chart - 3T Jib Crane

This load chart only applies to Haulotte attachments






HTL-4014

Part number/s
2820305490
2820303980



Max. capacity
3000kg
Mass 140kg

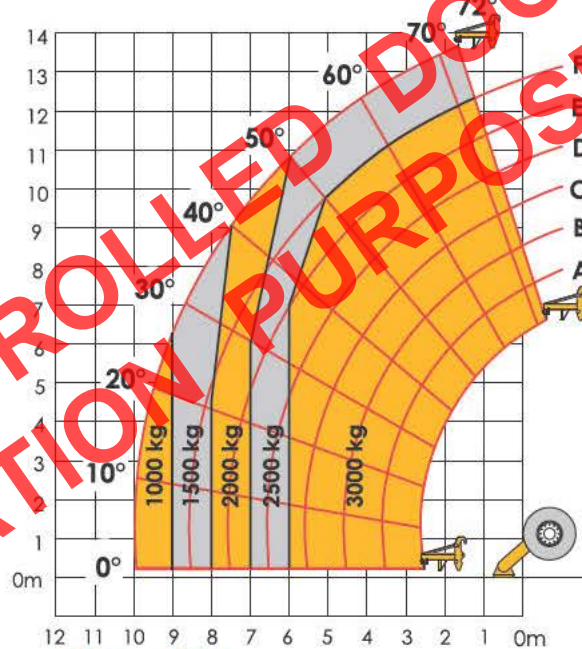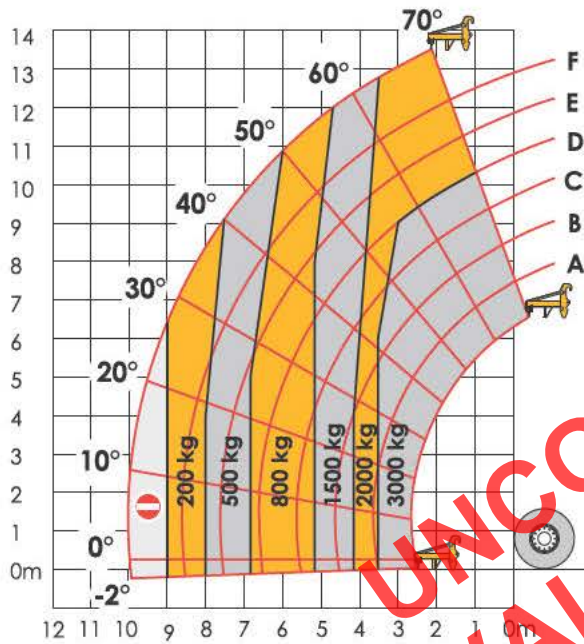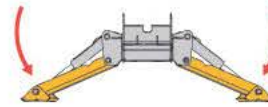

WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

SAFE USE INFORMATION


Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR


Pick & Carry Information

- Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
- Boom fully retracted with rated load 300mm above the ground
- In-service wind speed 10 m/s - 36 km/h
- Ground conditions: solid surfaces for lifting and travelling
- Hanging loads: secure load before travelling

Stationary

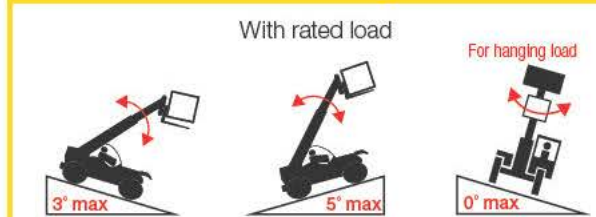

Pick and Carry (Travelling)

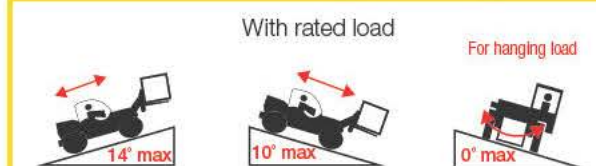

HTL-4014 Load Chart - 4-in-1 Bucket

This load chart only applies to Haulotte attachments




HTL-4014

Part number/s
2820302830



Max. capacity
2500kg
Mass 655kg

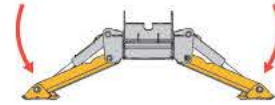

SAFE USE INFORMATION


Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR


Pick & Carry Information

1. Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
2. Boom fully retracted with rated load 300mm above the ground
3. In-service wind speed 10 m/s - 36 km/h
4. Ground conditions: solid surfaces for lifting and travelling

The abusive use of the accessory can deteriorate the telescopic boom.

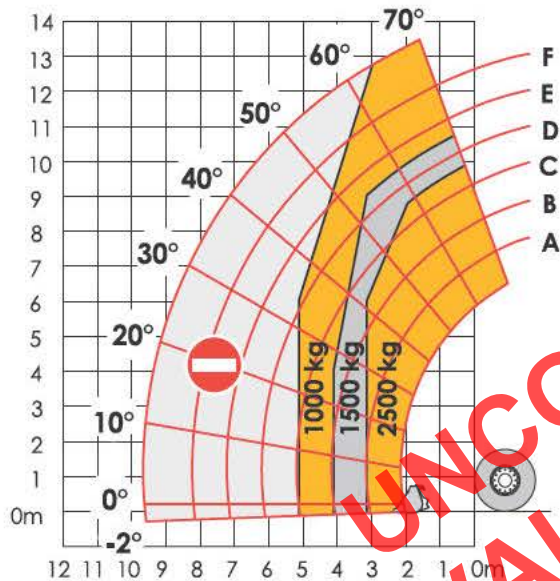

The abusive use of the accessory can deteriorate the telescopic boom.

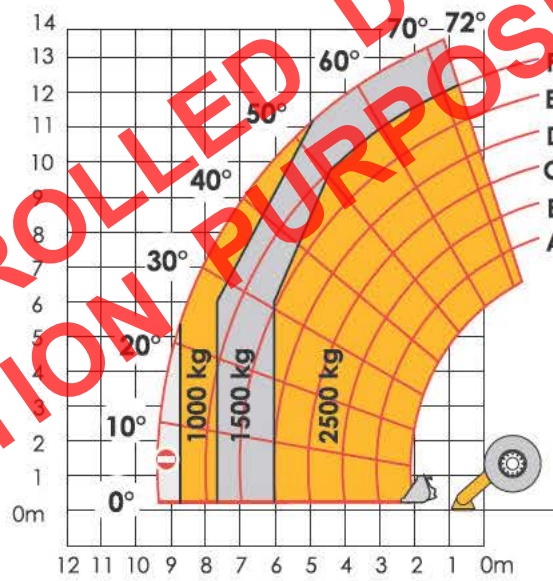

WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

Stationary

With rated load

Pick and Carry (Travelling)

With rated load

HTL-4014 Load Chart - Bucket With Teeth

This load chart only applies to Haulotte attachments




HTL-4014

Part number/s
2820302820
2326013990



Max. capacity
2500kg
Mass 590kg

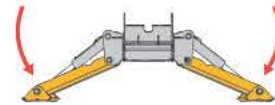

SAFE USE INFORMATION


Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR


Pick & Carry Information

1. Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
2. Boom fully retracted with rated load 300mm above the ground
3. In-service wind speed 10 m/s - 36 km/h
4. Ground conditions: solid surfaces for lifting and travelling

The abusive use of the accessory can deteriorate the telescopic boom.

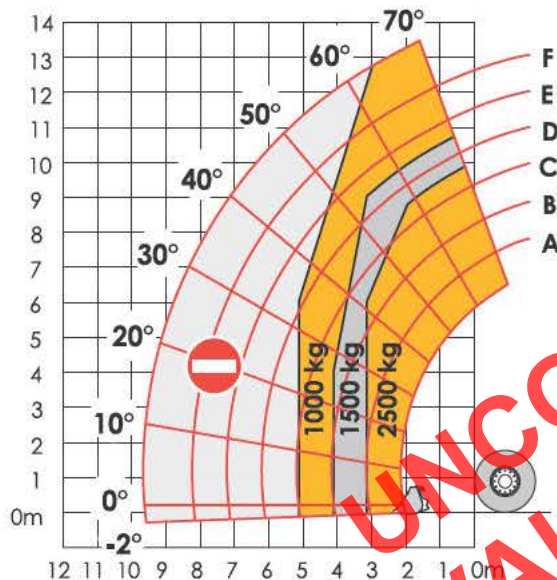

The abusive use of the accessory can deteriorate the telescopic boom.

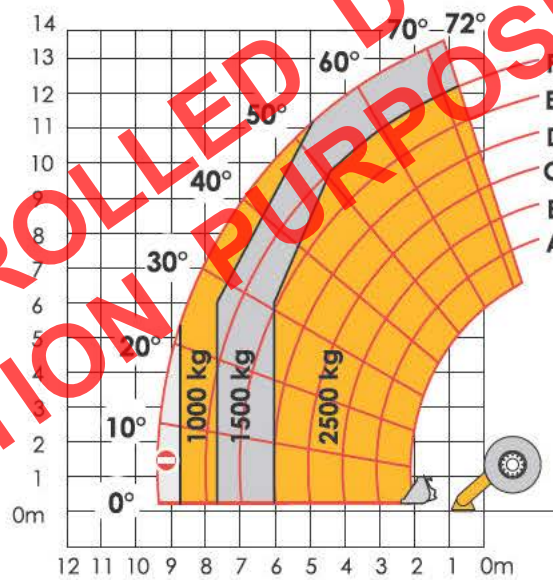

WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

Stationary

With rated load



Pick and Carry (Travelling)

With rated load




HTL-4014 Load Chart - Fly Jib 4m

This load chart only applies to Haulotte attachments

HTL-4014

Part number/s
2820304090
2820307460



Max. capacity
600kg
Mass 276kg


SAFE USE INFORMATION

Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR


Pick & Carry Information

- Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
- Boom fully retracted with rated load 300mm above the ground
- In-service wind speed 10 m/s - 36 km/h
- Ground conditions: solid surfaces for lifting and travelling
- Hanging loads: secure load before travelling

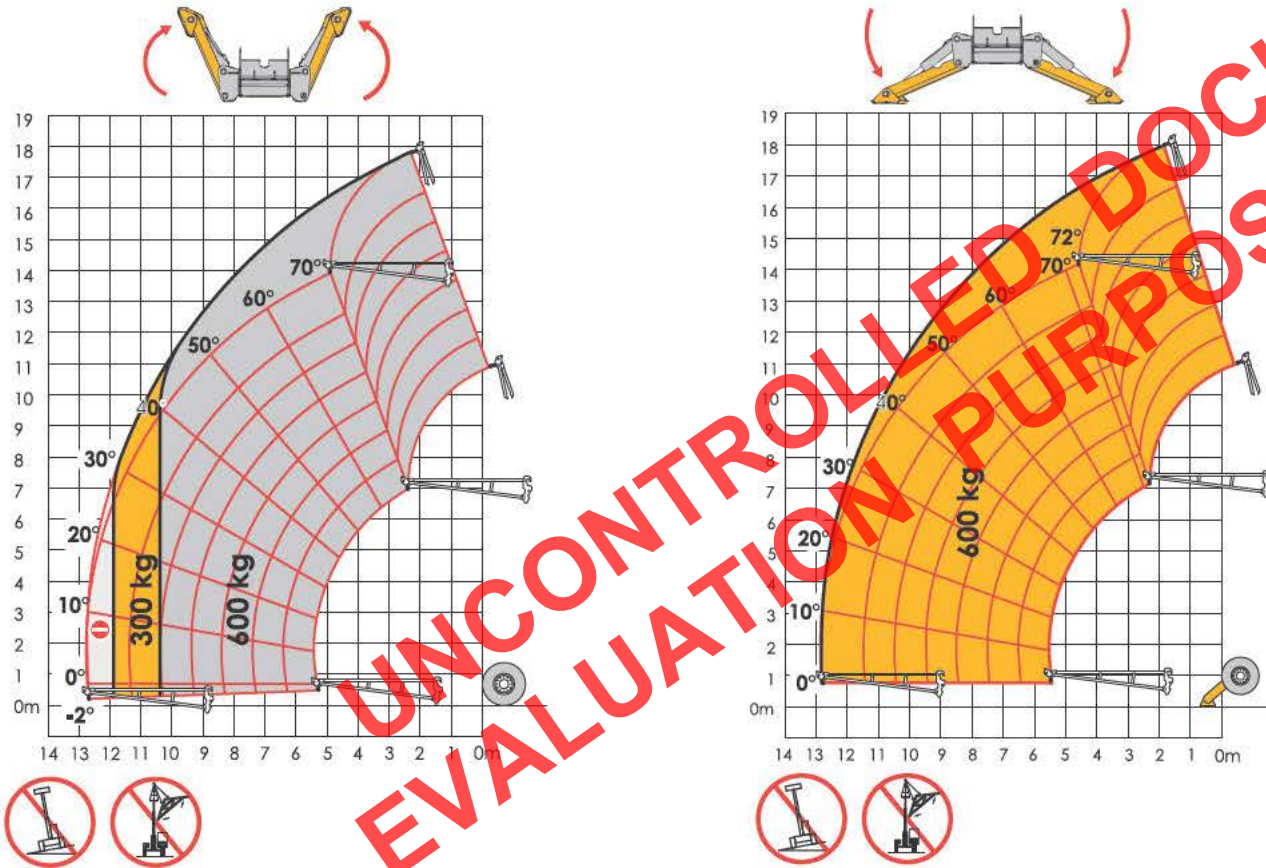


WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

Stationary

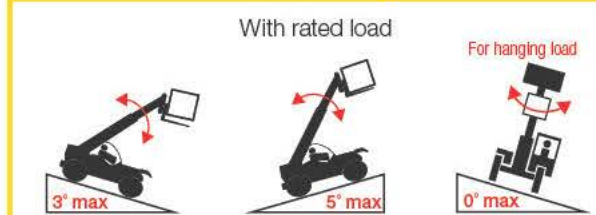

Pick and Carry (Travelling)

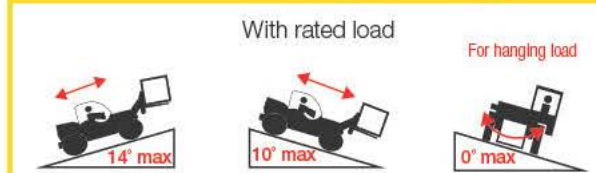


HTL-4014 Load Chart - Fly Jib 4m + 0.6T Winch

This load chart only applies to Haulotte attachments



HTL-4014

Part number/s
2820304130



Max. capacity
600kg
Mass 375kg


SAFE USE INFORMATION

Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR


Pick & Carry Information

- Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
- Boom fully retracted with rated load 300mm above the ground
- In-service wind speed 10 m/s - 36 km/h
- Ground conditions: solid surfaces for lifting and travelling
- Hanging loads: secure load before travelling

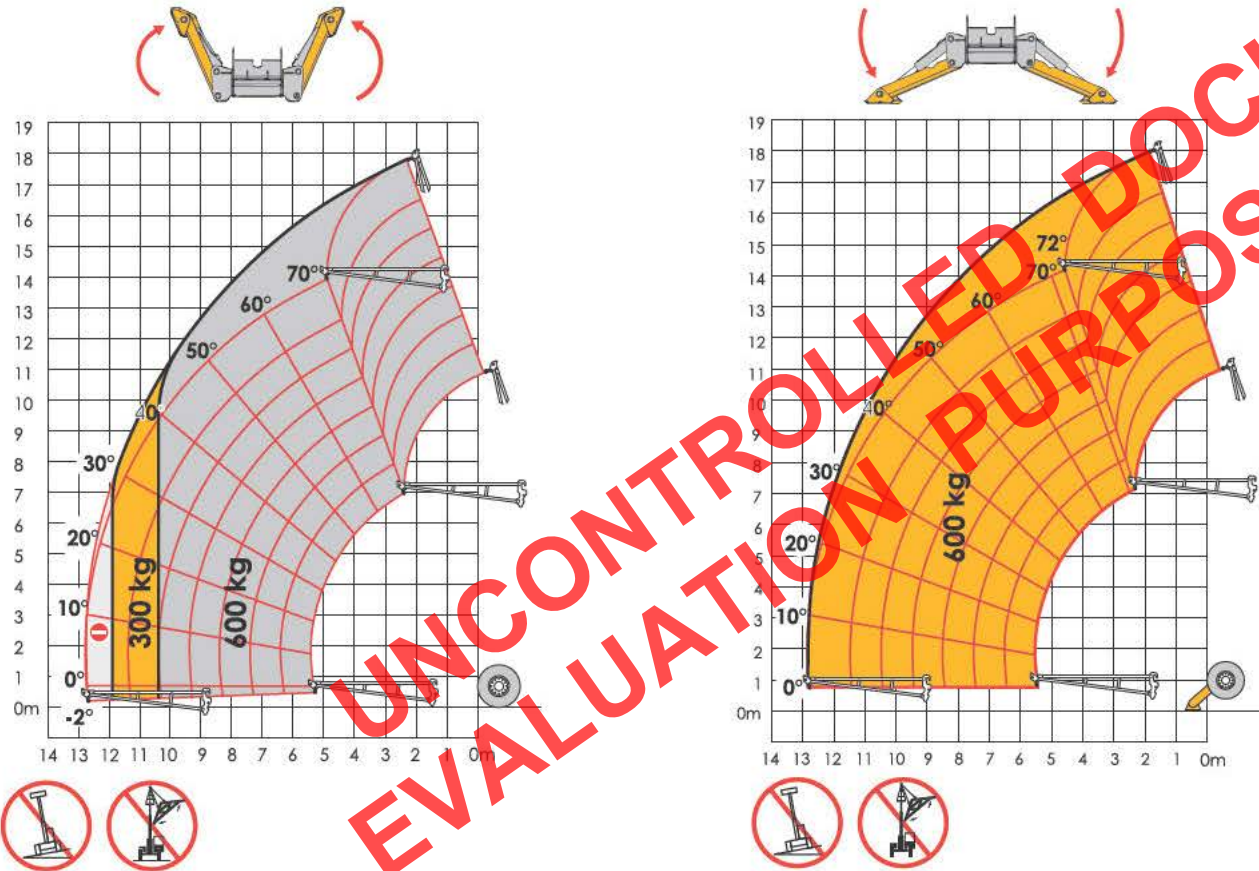


WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

Stationary

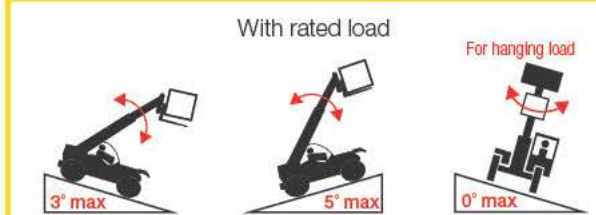

Pick and Carry (Travelling)

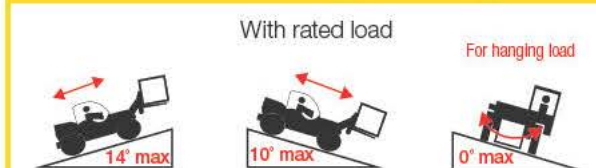


HTL-4014 Load Chart - Fly Jib 2.5m

This load chart only applies to Haulotte attachments






HTL-4014

Part number/s
2820304080
2820307450



Max. capacity
1200kg
Mass 280kg

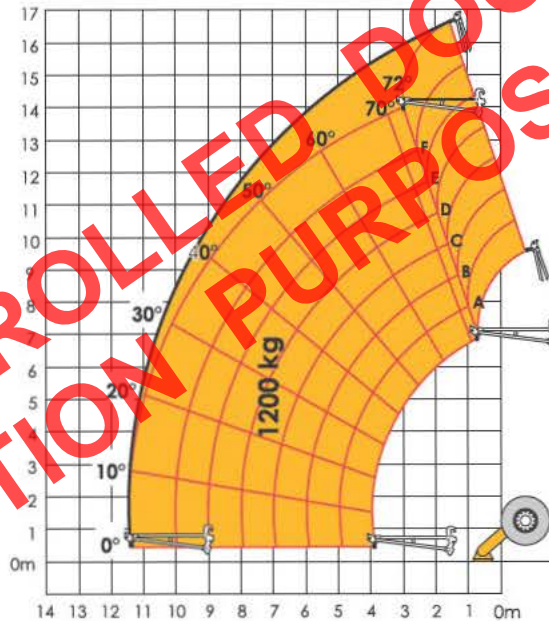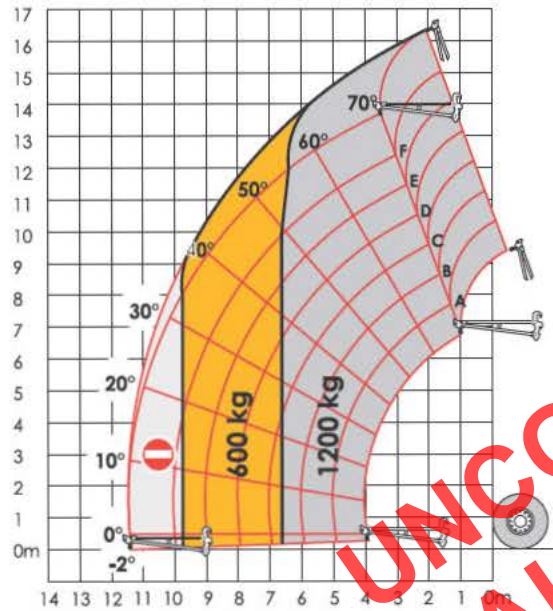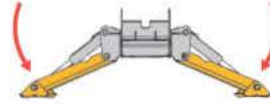

WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

SAFE USE INFORMATION


Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR


Pick & Carry Information

- Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
- Boom fully retracted with rated load 300mm above the ground
- In-service wind speed 10 m/s - 36 km/h
- Ground conditions: solid surfaces for lifting and travelling
- Hanging loads: secure load before travelling

Stationary

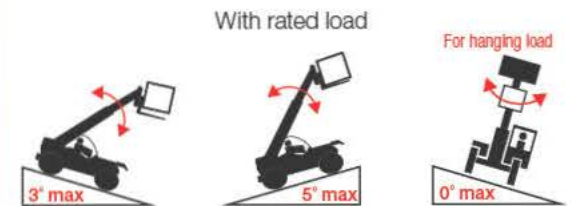

Pick and Carry (Travelling)

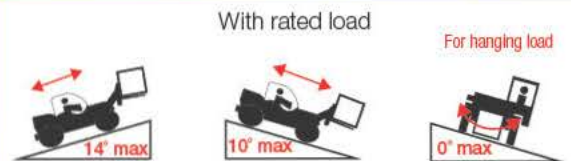

HTL-4014 Load Chart - Fly Jib 2.5m + 1.2T Winch

This load chart only applies to Haulotte attachments






HTL-4014

Part number/s
2820304120



Max. capacity
1200kg
Mass 310kg

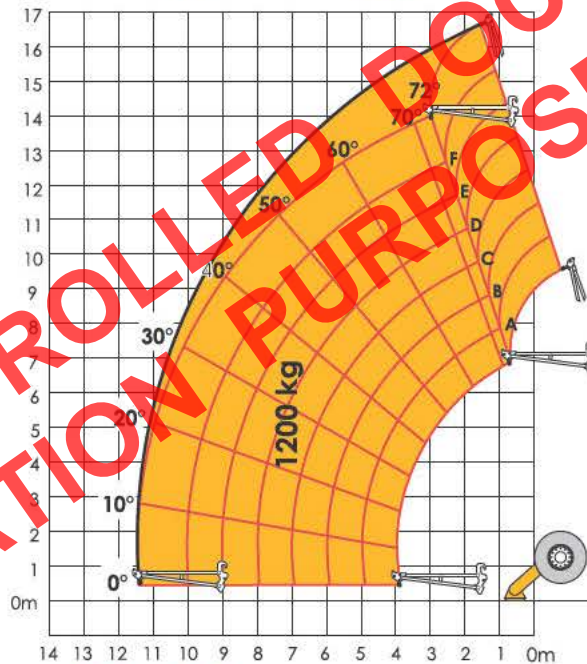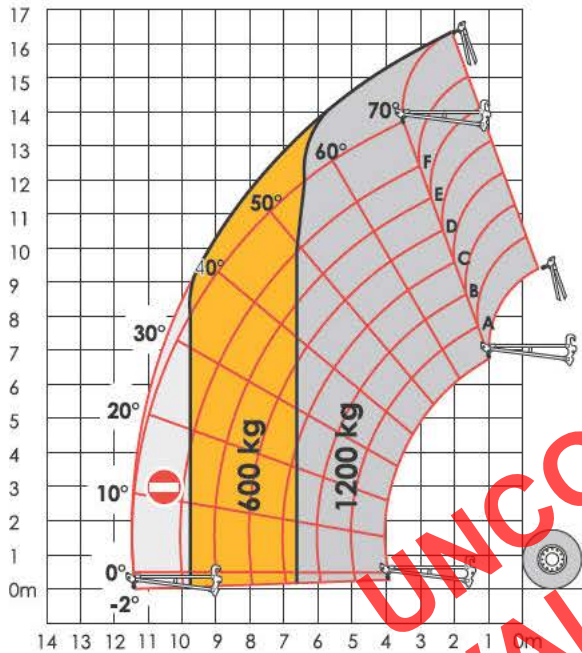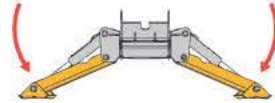

WARNING: Load Charts are different for each attachment fitted to the Telehandler.
Please ensure the attachment part number is as shown above.
Use only Haulotte attachments.

SAFE USE INFORMATION

Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR

Pick & Carry Information

- Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
- Boom fully retracted with rated load 300mm above the ground
- In-service wind speed 10 m/s - 36 km/h
- Ground conditions: solid surfaces for lifting and travelling
- Hanging loads: secure load before travelling

Stationary



Pick and Carry (Travelling)



HTL-4014 Load Chart - Work Platform

This load chart only applies to Haulotte attachments



HTL-4014

Part number/s
194P289480



Max. capacity
500kg
Mass 770kg

SAFE USE INFORMATION

Tyre Size and Pressure


	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR

Site Conditions

Ground conditions: solid surfaces for lifting and travelling

Stationary

With rated load

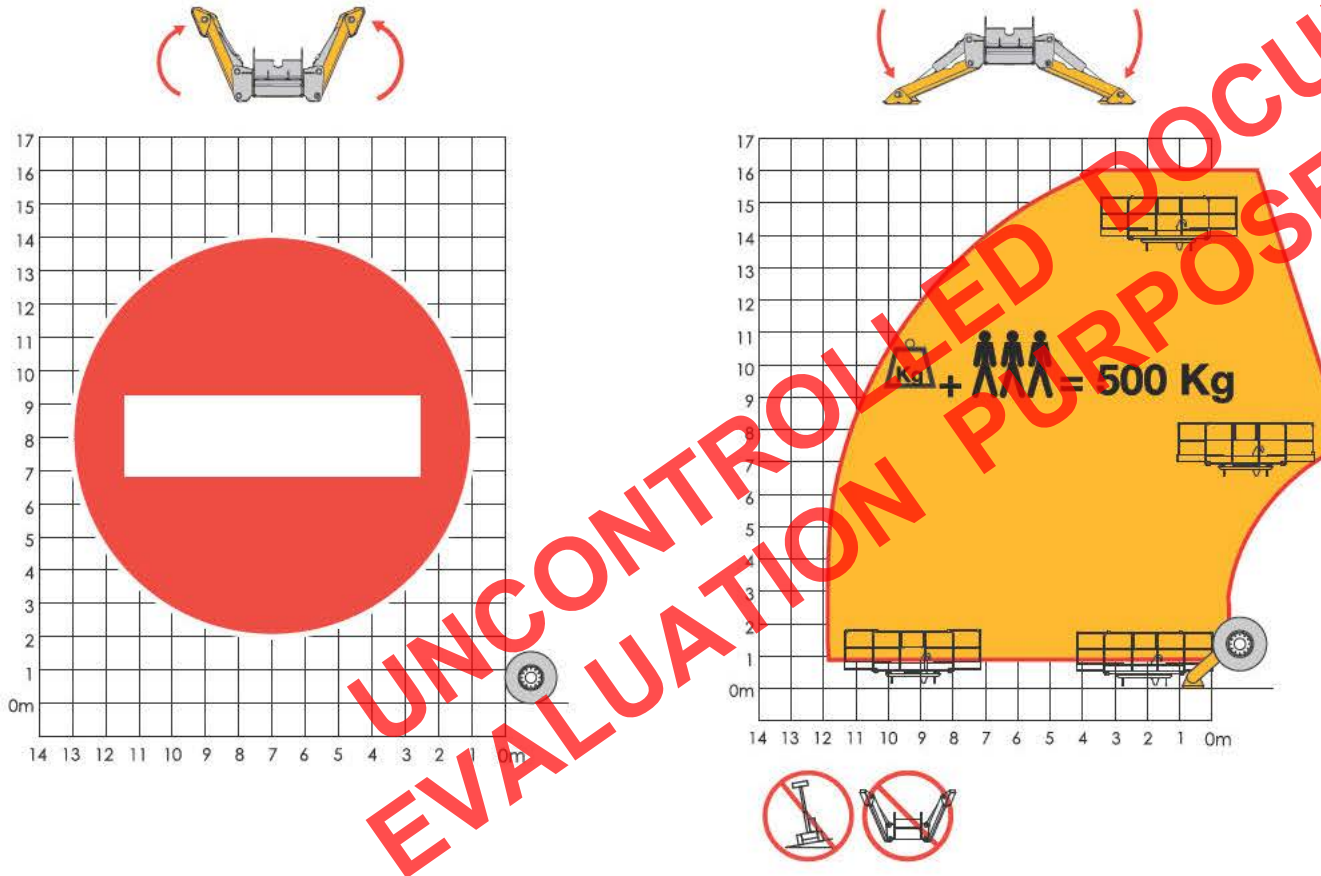

WARNING: Load Charts are different for each attachment fitted to the Telehandler.
Please ensure the attachment part number is as shown above.
Use only Haulotte attachments.

HTL-4014 Load Chart - Side Shift Forks

This load chart only applies to Haulotte attachments






HTL-4014

Part number/s
2820303940



Max. capacity
3000kg
Mass 390kg

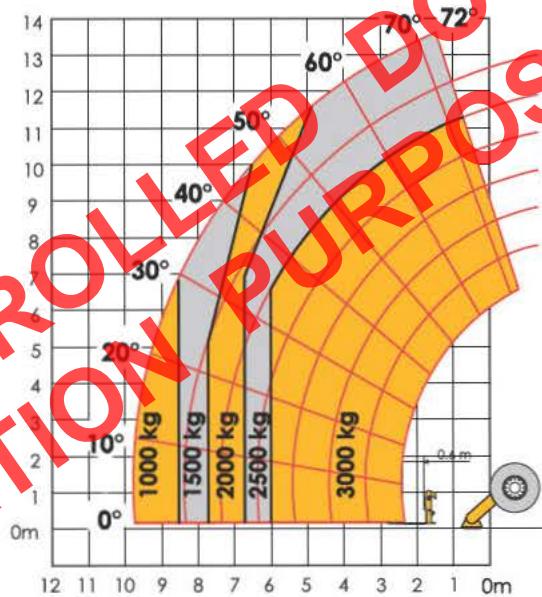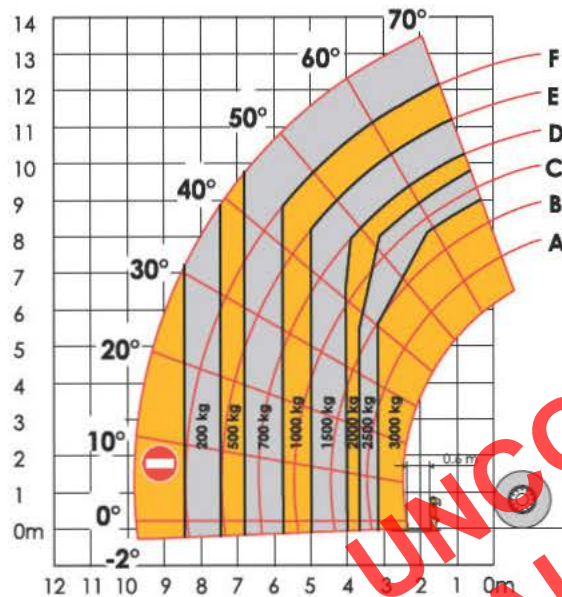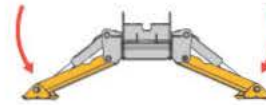

WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

SAFE USE INFORMATION

Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR

Pick & Carry Information

1. Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
2. Boom fully retracted with rated load 300mm above the ground
3. In-service wind speed 10 m/s - 36 km/h
4. Ground conditions: solid surfaces for lifting and travelling

Stationary

With rated load



Pick and Carry (Travelling)

With rated load



HTL-4014 Load Chart - Standard Forks

This load chart only applies to Haulotte attachments





HTL-4014

Part number/s

194P270330
194P287760
194P306620
194P306810



Max. capacity
4000kg
Mass 265kg

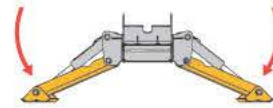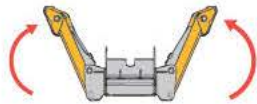



SAFE USE INFORMATION

Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR

Pick & Carry Information

1. Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
2. Boom fully retracted with rated load 300mm above the ground
3. In-service wind speed 10 m/s - 36 km/h
4. Ground conditions: solid surfaces for lifting and travelling

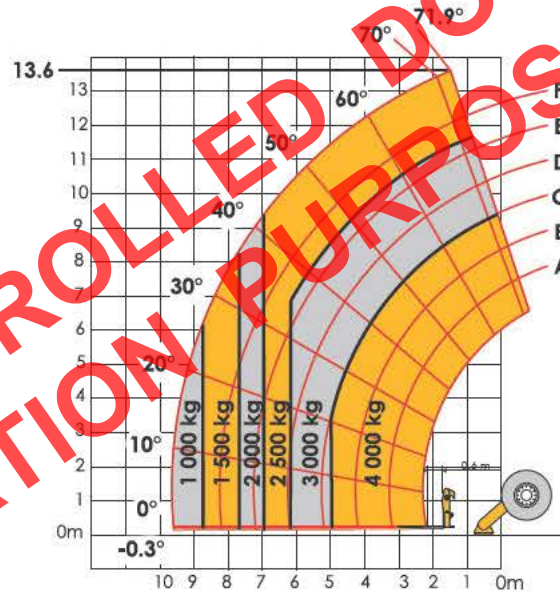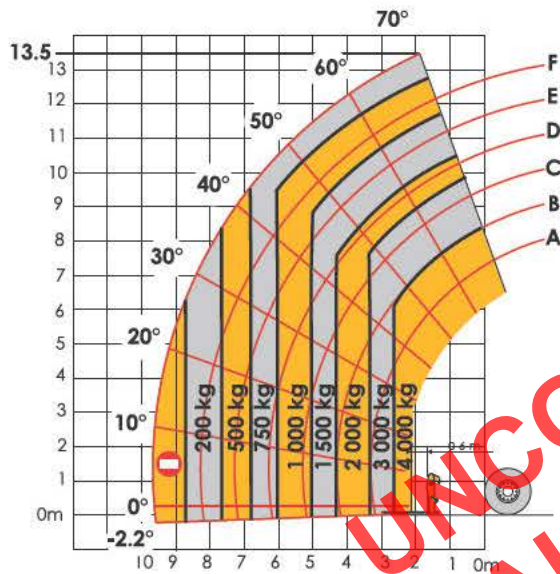

WARNING: Load Charts are different for each attachment fitted to the Telehandler. Please ensure the attachment part number is as shown above. Use only Haulotte attachments.

Stationary

With rated load

Pick and Carry (Travelling)

With rated load

HTL-4014 Load Chart - Toothless Bucket

This load chart only applies to Haulotte attachments





HTL-4014

Part number/s 2820302810
2820303930





Max. capacity 2500kg
Mass 460kg

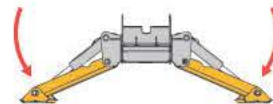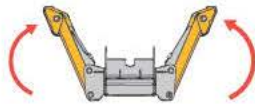

The abusive use of the accessory can deteriorate the telescopic boom.

The abusive use of the accessory can deteriorate the telescopic boom.

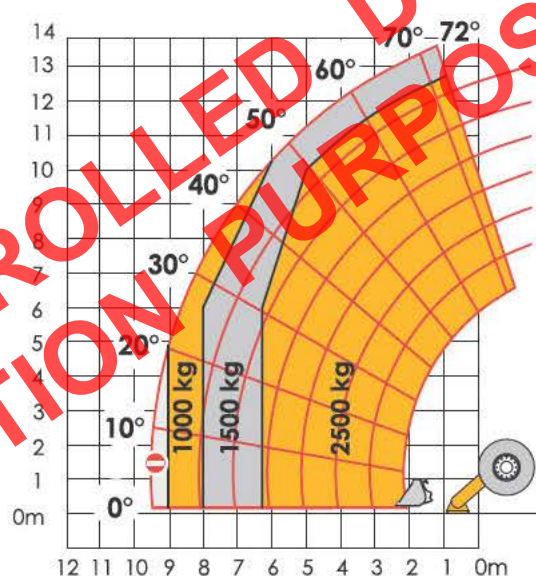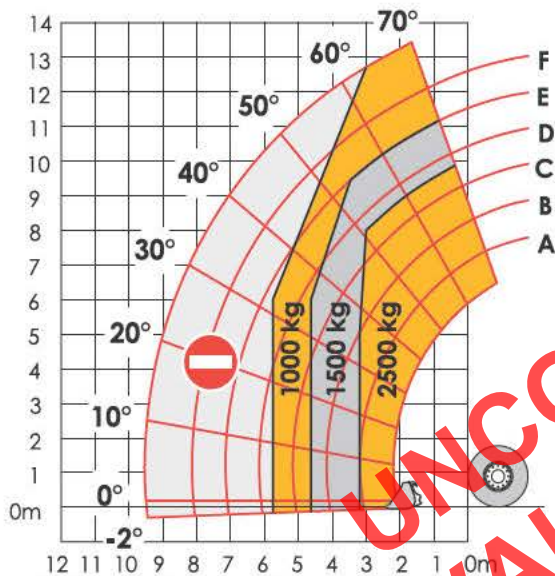

WARNING: Load Charts are different for each attachment fitted to the Telehandler.
Please ensure the attachment part number is as shown above.
Use only Haulotte attachments.

SAFE USE INFORMATION

Tyre Size and Pressure

	SOLIDEAL	MITAS
Size	18-22.5 4LR4	18-22.5 MPT-06
Pressure	450 kpa (65 psi)	510 kpa (74 psi)
Ply rating	16PR	16PR

Pick & Carry Information

1. Travel speed with rated load 0.4 m/s (1.5km/h) (walking speed)
2. Boom fully retracted with rated load 300mm above the ground
3. In-service wind speed 10 m/s - 36 km/h
4. Ground conditions: solid surfaces for lifting and travelling

Stationary

With rated load



Pick and Carry (Travelling)

With rated load

